


1. Introduction

GMC-SSR series is a product with a low level of density and modulus.
It is very soft with an excellent sealing effect.

2. Application

- Used for the LCD panels and modules on cellular phones, navigation systems PDAs, PMBs, digital cameras, LCD TVs and monitors
- Used for the vibration dampers on speakers, motors for vibration and ringers
- Used for the circuits on PCBs and FPCBs

3. Maximum Compression

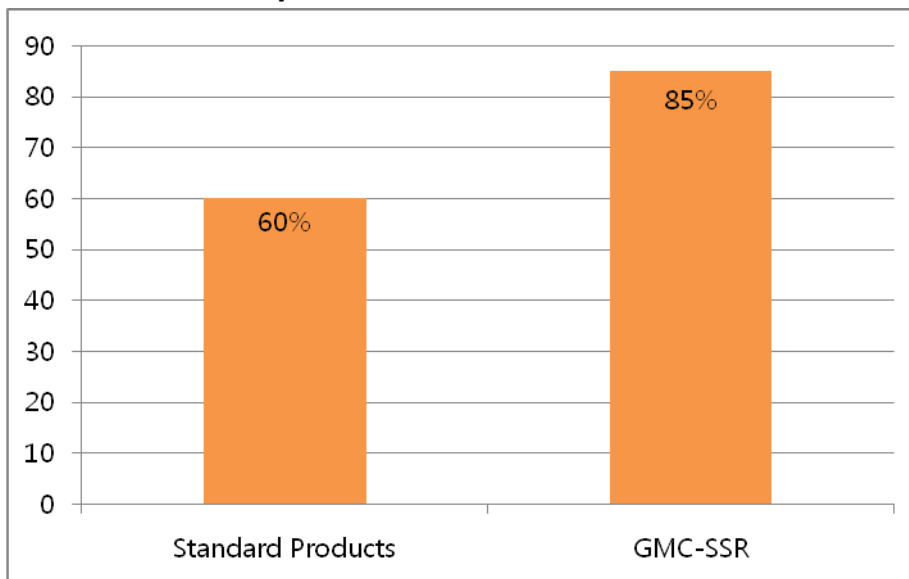

4. Technical data

Properties	Unit	Values	Test Method
Color		Black	
Thickness	mm	0.50~3.00	Thickness Gauge
Density	g/cm ³	0.15	ASTM D 3574
CLD *1)	25%	0.08	JIS K6254
	50%	0.16	
Compression set *2)	%	≤3	ASTM D 3574

*1) Compression Load Deflection

*2) 50% compressed at 70°C * 22hrs