


LCD用 Protect Glass用 R-Tape (ABG)

- R Tape

STRUCTURE

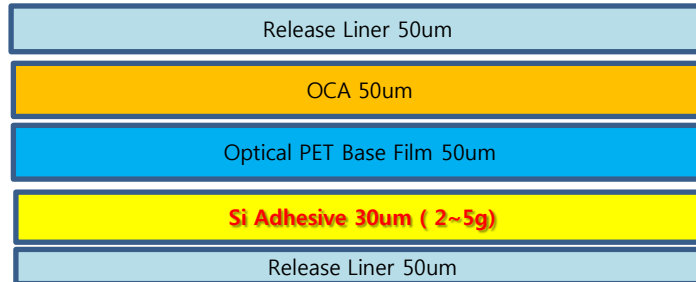

PROPERTIES & PRODUCT BENEFITS

Test Item		Unit	Spec.	Remark
Base Film Spec	B/F	μm	50 ± 2	PET
	Liner		50 ± 2	
	Protective Film		-	
Coating Spec	B/F Si	μm	30 ± 3	Si Adhesive
	B/F OCA		50 ± 1	UV OCA Adhesive
	Protective Film		-	-
Total Thickness		μm	230 ± 10	-
Optical Standard	TT	%	≥ 90 up	JIS K7105/Main Film Standard
	Haze	%	≤ 1.0 down	JIS K7105/Main Film Standard
Peculiarity Standard	Pencil Hardness	-		JIS K5600
	Adhesive strength	gf	2-5	ASTM D903-98
	Cross Cutting	-	100/100	Cross-hatch test
Temperature Standard	thermal shrinkage	%	MD ≤1.5, TD ≤1.0	PET Marker Inform (150°C/30min)